


The Cutting Edge

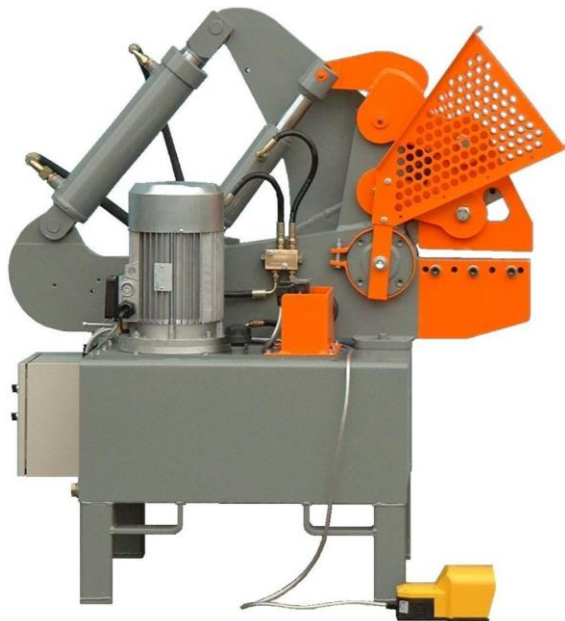

Brief Description

Hydraulic heavy duty shear with three phase electric motor.
Electric Control System.
Bronze bearings throughout.

Features

- Four sided reversible serrated blades.
- Tank mounted motor.
- Oil sequence, re-generation & speed valve
- Four way fork-lift entry base.
- Electric foot pedal control
- Hydraulic Hold Down.
- Compact with parts accessible for easy service.

Deltax reserves the right to alter the product specification in any way without giving prior notification.

Specification	Dimension	DTX 300RB
Overall	Length	1473mm (58")
	Width	760mm (30")
	Height	1499mm (59")
	Weight	1000kg
Blade	Length	305mm (12")
	Opening	90mm (3,1/2")
Blade Table	Height	845mm (33,1/4")
Max Shear Force	Tonnes Force	135
Shear Capacity	Steel Round Bar 45 kg/mm	50 (1 7/8")
	High tensile rebar # 14	45 (1 3/4")
	Multiples of smaller bars	
Oil	ISO 46	150ltr (33 Gall)
KW	Three Phase	10HP (7.5kW)
Speed	Three Phase	10 - 30 cuts/min

Deltax Limited

6, Bottings Ind. Est., Curdridge, Botley, Hants, SO30 2DY, England UK
 Tel: +44 (0)1489 784 711 Fax: +44 (0)1489 784 340
 Web: www.deltax.co.uk Email: deltax@btconnect.com